

1N5820 THRU 1N5822



3.0 AMP SCHOTTKY BARRIER RECTIFIERS



FEATURES

- * Low forward voltage drop
- * High current capability
- * High reliability
- * High surge current capability
- * Epitaxial construction

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any
- * Weight: 1.04 grams
- * Lead Free Finish/RoHS Compliant


VOLTAGE RANGE

20 to 40 Volts

CURRENT

3.0 Ampere

DO-27

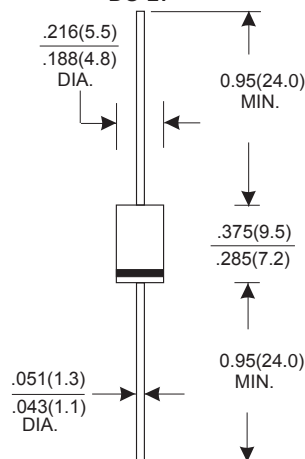

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

| TYPE NUMBER | 1N5820 | 1N5821 | 1N5822 | UNITS |
|--|------------|--------|--------|-------|
| Maximum Recurrent Peak Reverse Voltage | 20 | 30 | 40 | V |
| Maximum RMS Voltage | 14 | 21 | 28 | V |
| Maximum DC Blocking Voltage | 20 | 30 | 40 | V |
| Maximum Average Forward Rectified Current | | | | A |
| .375"(9.5mm) Lead Length at Ta=90°C | 3.0 | | | A |
| Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method) | 80 | | | A |
| Maximum Instantaneous Forward Voltage at 3.0A | .475 | .500 | .525 | V |
| Maximum DC Reverse Current Ta=25°C | 500 | | | uA |
| at Rated DC Blocking Voltage Ta=100°C | 20 | | | mA |
| Typical Junction Capacitance (Note1) | 250 | | | pF |
| Typical Thermal Resistance RθJA (Note 2) | 20 | | | °C/W |
| Operating Temperature Range Tj | -65 — +125 | | | °C |
| Storage Temperature Range Tstg | -65 — +150 | | | °C |

NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Ambient Vertical PC Board Mounting 0.5"(12.7mm) Lead Length.

RATING AND CHARACTERISTIC CURVES (1N5820 THRU 1N5822)

FIG.1-TYPICAL FORWARD CHARACTERISTICS

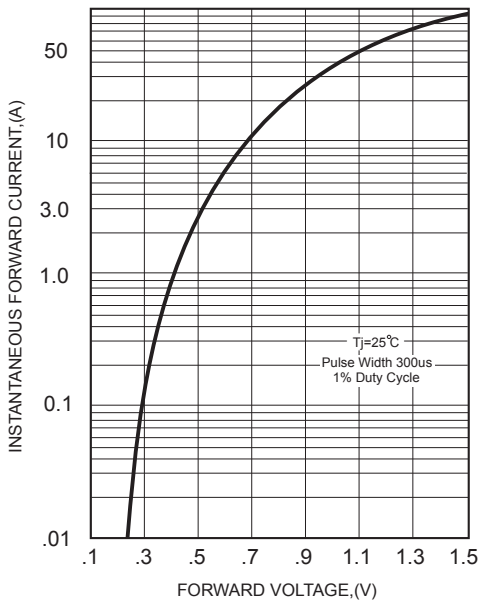


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

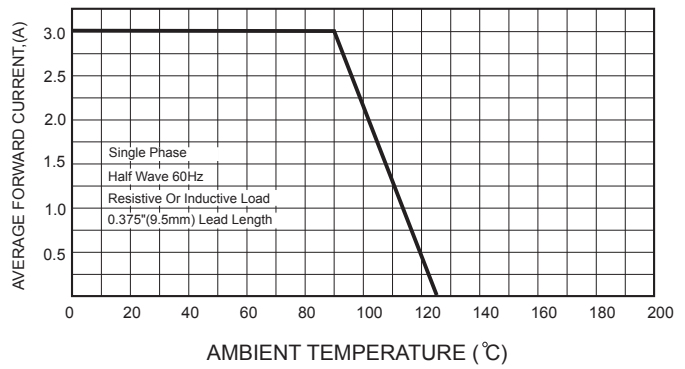


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

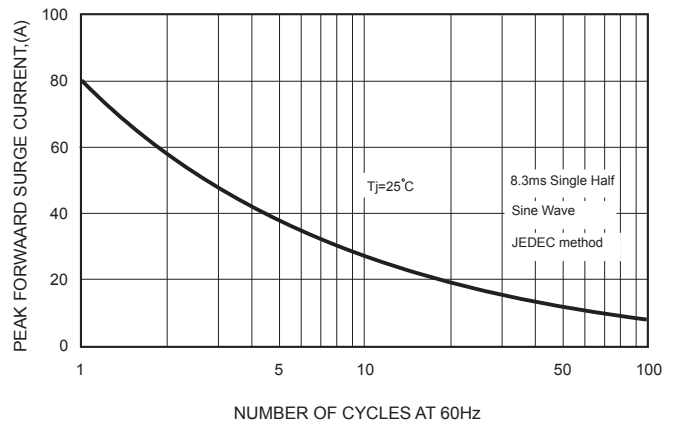


FIG.3 - TYPICAL REVERSE CHARACTERISTICS

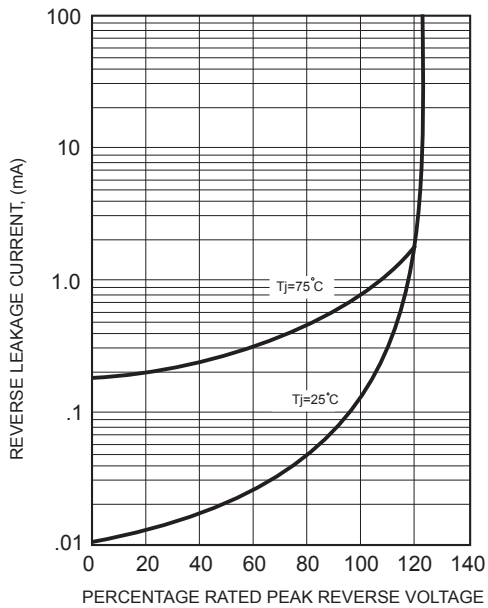


FIG.5-TYPICAL JUNCTION CAPACITANCE

