



KBPC25005W THRU KBPC2510W



SINGLE PHASE 25 AMP BRIDGE RECTIFIERS



FEATURES


- * Superior thermal design
- * 400 amperes surge capability
- * Mounting: Hole thru for #8 screw
- * 1/4" universal faston terminal
- * Lead Free Finish/RoHS Compliant

VOLTAGE RANGE

50 to 1000 Volts

CURRENT

25.0 Ampere

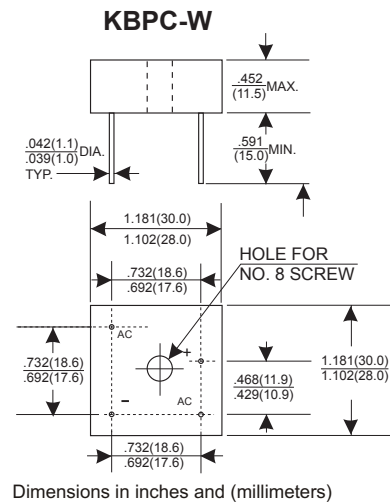

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	KBPC25005W	KBPC2501W	KBPC2502W	KBPC2504W	KBPC2506W	KBPC2508W	KBPC2510W	UNITS	
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V	
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at Tc=55°C								25	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)				400					A
Maximum Forward Voltage Drop per Bridge Element at 12.5AD.C.				1.1					V
Maximum DC Reverse Current Ta=25°C				10					uA
at Rated DC Blocking Voltage Ta=100°C				1000					uA
Operating Temperature Range, Tj				-55	+125				°C
Storage Temperature Range, TSTG				-55	+150				°C

RATING AND CHARACTERISTIC CURVES (KBPC25005W THRU KBPC2510W)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

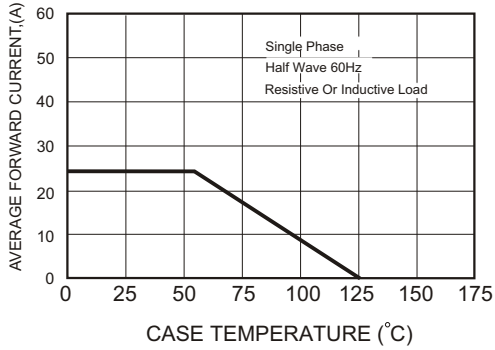


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

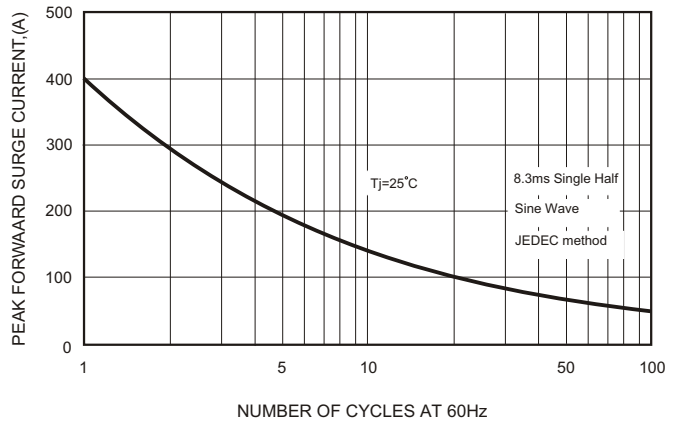


FIG.3-TYPICAL FORWARD CHARACTERISTICS

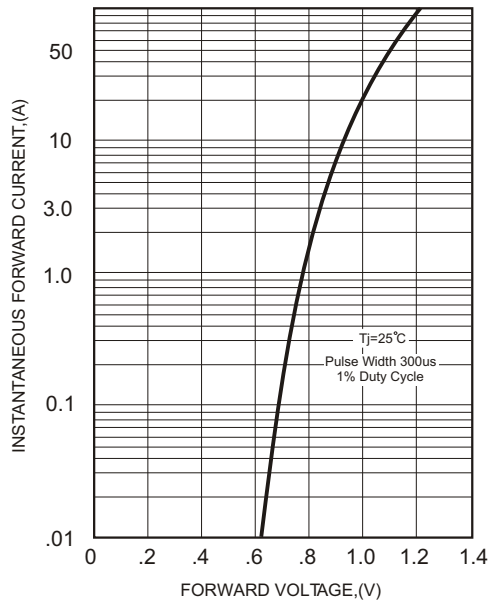


FIG.4-TYPICAL REVERSE CHARACTERISTICS

