


MBR3020CT THRU MBR30100CT



30.0 AMP SCHOTTKY BARRIER RECTIFIERS

FEATURES

- * Low forward voltage drop
- * High current capability
- * High reliability
- * High surge current capability
- * Epitaxial construction

MECHANICAL DATA


- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: Lead solderable per MIL-STD-202, method 208 guaranteed
- * Polarity: As Marked
- * Mounting position: Any
- * Weight: 1.81 grams
- * Lead Free Finish/RoHS Compliant

VOLTAGE RANGE

20 to 100 Volts

CURRENT

30.0 Ampere

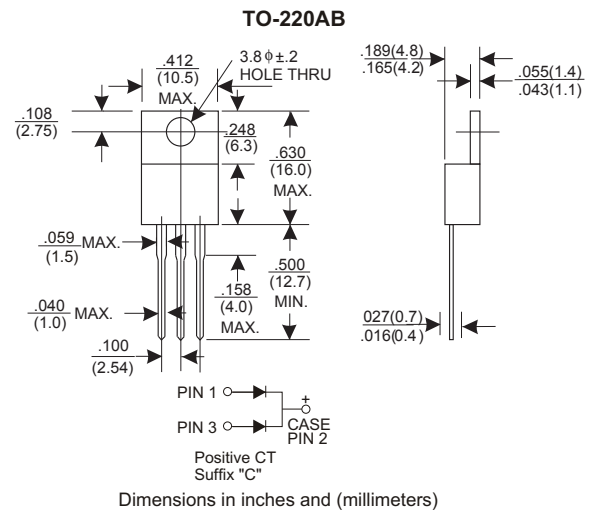

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	MBR3020	MBR3030	MBR3035	MBR3040	MBR3045	MBR3060	MBR30100	UNITS
Maximum Recurrent Peak Reverse Voltage	20	30	35	40	45	60	100	V
Maximum RMS Voltage	14	21	24	28	32	42	70	V
Maximum DC Blocking Voltage	20	30	35	40	45	60	100	V
Maximum Average Forward Rectified Current See Fig. 1	30							A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	300							A
Maximum Instantaneous Forward Voltage per Leg at 15.0A	0.65					0.75	0.85	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	500				30			uA mA
Typical Thermal Resistance R _{JC} (Note 1)	1.4							°C/W
Operating Temperature Range T _J	-65 — +125							°C
Storage Temperature Range T _{STG}	-65 — +150							°C
Voltage Rate of Change (Rated V _R)	10,000							V/μs

NOTES:

1. Thermal Resistance Junction to Case.

RATING AND CHARACTERISTIC CURVES (MBR3020CT THRU MBR30100CT)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

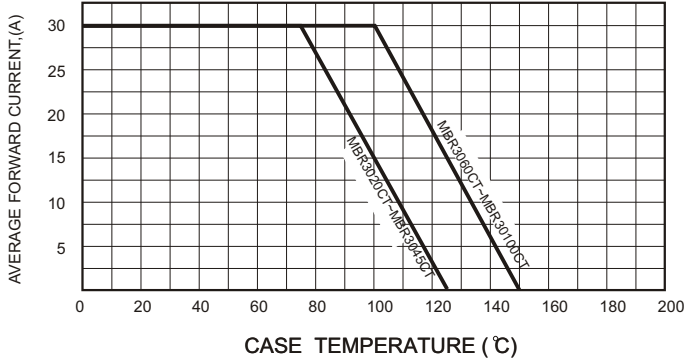


FIG.2-TYPICAL FORWARD CHARACTERISTICS

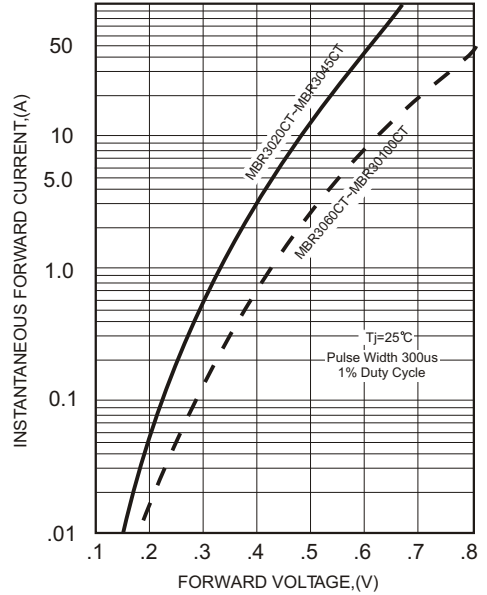


FIG.3 - TYPICAL REVERSE CHARACTERISTICS

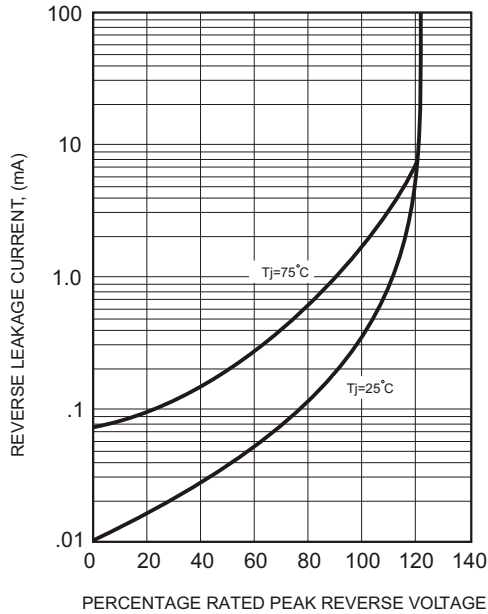


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

