


GBU8005 THRU GBU810



SINGLE PHASE 8.0 AMP BRIDGE RECTIFIERS

FEATURES


- * Ideal for printed circuit board
- * Low forward voltage
- * Low leakage current
- * Polarity: marked on body
- * Mounting position: Any
- * Lead Free Finish/RoHS Compliant

VOLTAGE RANGE

50 to 1000 Volts

CURRENT

8.0 Ampere

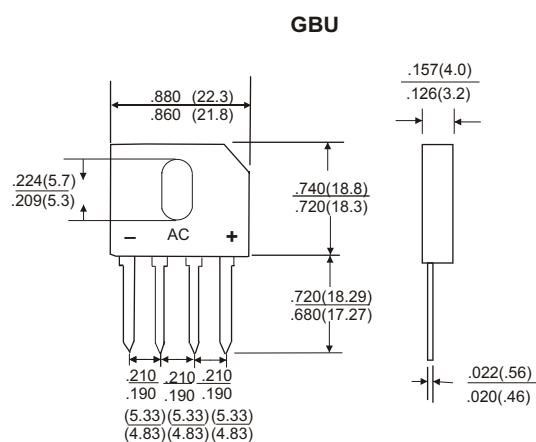

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

| TYPE NUMBER | GBU8005 | GBU801 | GBU802 | GBU804 | GBU806 | GBU808 | GBU810 | UNITS | |
|---|---------|--------|--------|--------|--------|--------|--------|------------|----|
| Maximum Recurrent Peak Reverse Voltage | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V | |
| Maximum RMS Voltage | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V | |
| Maximum DC Blocking Voltage | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V | |
| Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at Tc=50 °C | | | | | | | | 8.0 | A |
| Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method) | | | | | | | | 200 | A |
| Maximum Forward Voltage Drop per Bridge Element at 4.0A D.C. | | | | | | | | 1.1 | V |
| Maximum DC Reverse Current at Rated DC Blocking Voltage | | | | | | | | 10 | µA |
| | | | | | | | | 500 | µA |
| Operating Temperature Range, Tj | | | | | | | | -50 — +150 | °C |
| Storage Temperature Range, TSTG | | | | | | | | -50 — +150 | °C |

RATING AND CHARACTERISTIC CURVES (GBU8005 THRU GBU810)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

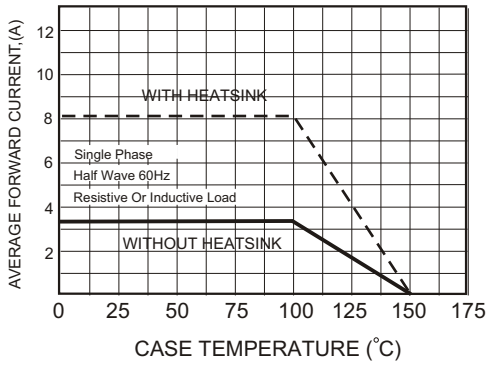


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

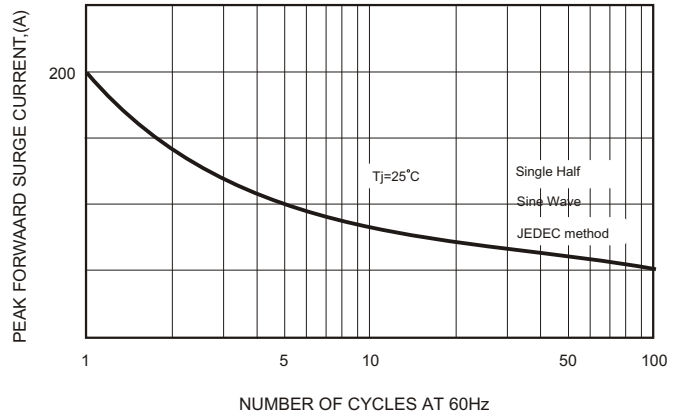


FIG.3-TYPICAL FORWARD CHARACTERISTICS

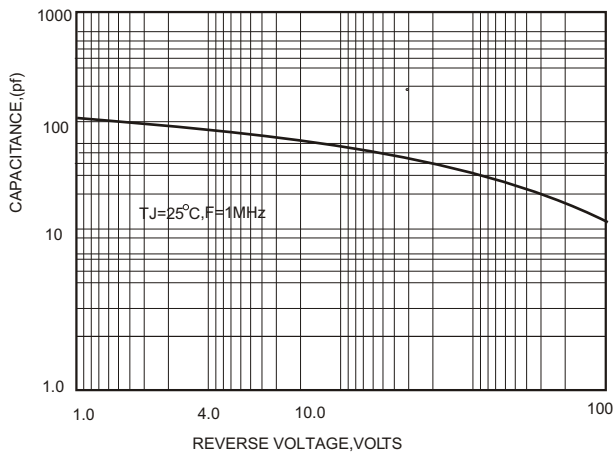


FIG.4-TYPICAL REVERSE CHARACTERISTICS

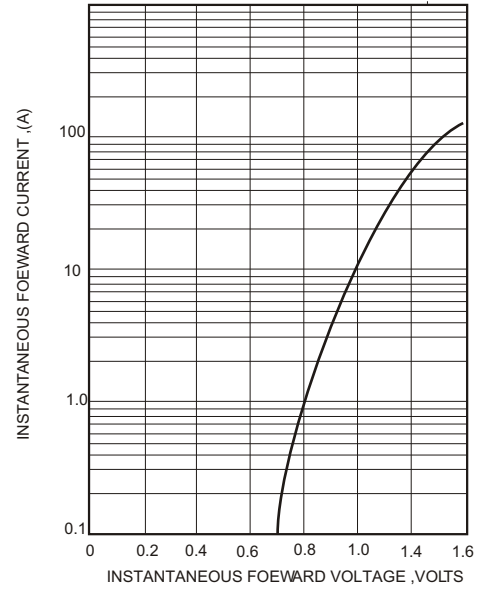


FIG.5-TYPICAL REVERSE CHARACTERISTICS

